

## 5 watt photovoltaic module

# SX 305

The SX 305 is a 5W module that uses standard polycrystalline cells and charges batteries efficiently in any climate. It is the smallest BP Solar module available and has been especially designed for use in off grid applications such as telecommunications, telemetry, instrumentation systems and signals. BP Solar's SX range of solar modules offer cost effective power for small or moderate energy requirements, with a wide range of module power and size options available for stand alone installations.

### Performance

Rated power	4.5W
Nominal voltage	12V
Warranty	90% power output over 12 years. Free from defects in materials and workmanship for 2 years.

### Configuration

SX 305M	Multimount frame with lo-pro junction box and output cables.
---------	--

### Qualification test parameters

Temperature cycling range	-40°C to +85°C for 200 cycles
Damp heat test	85°C and 85% relative humidity for 1000h
Front and rear static load test (eg: wind)	2400 Pa
Front load test (eg: snow)	5400 Pa
Hailstone impact test	25mm hail at 23m/s from 1m distance

### Quality and safety

- Manufactured in ISO 9001 and ISO 14003 certified factories
- Conforms to European Community Directives 89/33/EEC, 73/23/EEC, 93/68/EEC
- Certified to IEC 61215

Module power measurements calibrated to World Radiometric Reference through ESTI (European Solar Test Installation at Ispra, Italy)


Framed modules listed by Underwriter's Laboratories for electrical and fire safety (Class C fire rating)

Approved by Factory Mutual Research for application in NEC Class 1, Division 2, Groups C & D hazardous locations




SX 305

### SX 305M I-V Curves

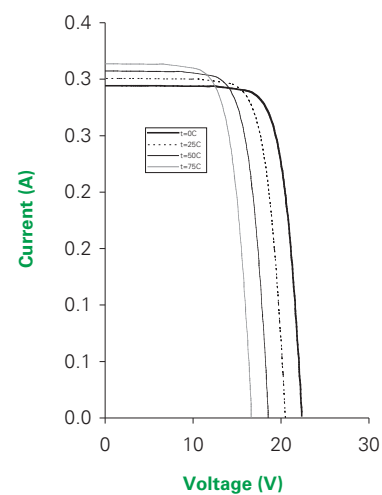

## 5 watt photovoltaic module SX 305

### Module diagram

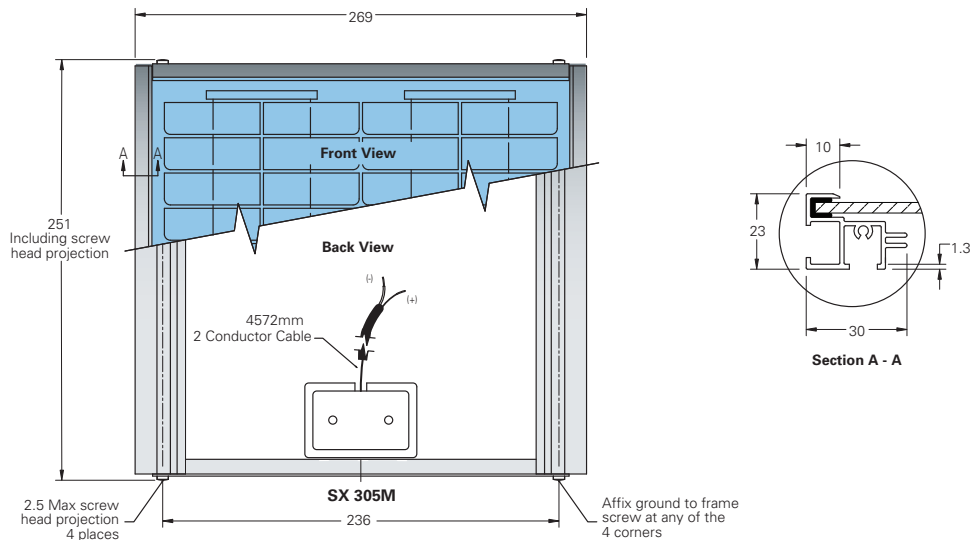

Self-tapping grounding screw, instruction sheet and warranty document included with each module.

### Typical electrical characteristics

### SX 305M

Maximum power ( $P_{max}$ )	4.5W
Warranted minimum power	4W
Voltage at $P_{max}$ ( $V_{mp}$ )	16.5V
Current at $P_{max}$ ( $I_{mp}$ )	0.27A
Short circuit current ( $I_{sc}$ )	0.3A
Open circuit voltage ( $V_{oc}$ )	20.5V
Temperature coefficient of $I_{sc}$	(0.065±0.015)%/°C
Temperature coefficient of $V_{oc}$	-(80±10)mV/°C
Temperature coefficient of $P_{max}$	-(0.5±0.05)%/°C
NOCT (Air 20°C; sun 0.8kW/m <sup>2</sup> ; wind speed 1m/s)	47±2°C
Maximum series fuse rating	1A
Maximum system voltage	50V (IEC 61215 rating)


Standard test conditions - irradiance of 1000W/m<sup>2</sup> at an AM1.5G solar spectrum and a temperature of 25°C.

### Mechanical characteristics

### SX 305M

Dimensions (mm) (Overall tolerances +/-3mm)	269 x 251 x 23
Weight (kg)	0.8
Frame	Clear anodised aluminium alloy type 6063T6. Silver multimount frame.
Solar cells	36 cells (19mm x 57mm) configured geometrically for a 4 x 9 matrix connected in series.
Output cables	RHW AWG# 18 (0.75mm <sup>2</sup> ) 2 core PLTC cable. Lengths 457mm ("-" black) and 457mm ("+" red).
Diodes	Two 9A, 45V Schottky by-pass diodes included.
Construction	Front: High transmission 3mm tempered glass. Rear: White polyester; encapsulant: EVA.

Your BP Solar representative:



©BP Solar Pty Ltd 2009